


**PUSH TO CONNECT
Water Heater
Installation Kit**

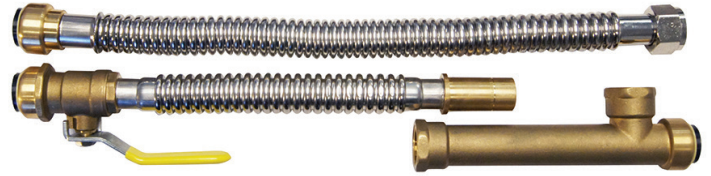

The Tectite by Mosack Group Water Heater Installation Kit with TankTee is the fastest, simplest and cleanest method by which to install a water heater with an expansion tank. With thread tape applied to water heater nipples, screw the TankTee to the cold water inlet and the 18 in. Corrugated Stainless Steel to the hot water outlet. After applying thread tape to the nipple on the expansion tank, screw the expansion tank into the threaded outlet of the TankTee and insert the 12 in. Corrugated Stainless Steel connector with brass insert into the top of the TankTee. Finally, make the final connections to the existing piping system utilizing the Push-To-Connect ends of the connectors. It is fast, simple and clean to install.

Features:

- Kit includes two connectors, TankTee and a demount clip.
- Makes installation of water heaters with expansion tank easy.
- Push-To-Connect design allows for a simple and fast installation on any combination of copper, PEX, CPVC or PE-RT pipe.
- Constructed of lead free dezincification resistant (DZR) brass and corrugated stainless steel for superior reliability and strength.
- No-kink corrugated stainless steel construction guarantees maximum flow rate even in tight radius bends.
- For use with 3/4 in. copper tube-sized pipe.
- Demount clip allows for fitting removal (included).
- Corrosion resistant for greater longevity.
- Ideal for potable water and hydronic heating applications.
- Fittings can be rotated after being installed for ease of use in tight spaces.
- 50-year connection / 5-year warranty.

Specifications & Approvals:

- IAPMO IGC 128-2008
- ASSE 1061/NSF 61
- Maximum working pressure of 200 psi
- Maximum temperature of 250° F.



Installation:

1. Apply thread sealing tape to all male threads.
2. Attach Tank Tee to cold water inlet on water heater
3. Insert stem end of 12 in. CSST connector with valve to Tank Tee, then attach valve end to cold water supply.
4. Attach expansion tank to Tank Tee.
5. Attach 3/4 in. FIP end of 18 in. CSST connector to water heater and push to connect to hot water supply.
6. Push Installation - Cut pipe. Mark insertion depth using the depth gauge (not included). Push and twist pipe into fitting until fitting edge meets depth line.

Tectite by Mosack Group Water Heater Installation Kit							
Part Number	Description	H	W	D	Wt (lbs)	Carton Qty	UPC
FSBTANKKIT	3/4 in. Push To Connect x 3/4 in. FIP Water Heater Installation Kit	24.50	6.50	1.75	2.44	3	191988005047