

SUBMITTAL SHEET

PEX-B

Brass Fittings

Apollo PEX Brass Fittings are used for making junctions or directional changes with PEX pipe constructed potable water systems.

All Apollo PEX Brass Fittings comply with the U.S. Safe Water Drinking Act (SDWA) and the 2011 U.S. Reduction of Lead in Drinking Water Act by containing equal to or less than 0.25% lead.

All Apollo PEX Brass Fittings have barb ends unless otherwise noted. The brass fittings may be directly buried or installed in concrete, gypsum based lightweight concrete, sand, asphalt, in or under wood flooring, or behind wallboard or plaster. Apollo PEX Brass Fittings can be used with Apollo brand PEX-A or PEX-B pipe.

Specifications:

Use Apollo PEX Brass Fittings with Apollo PEX pipe and fasten to pipe using Apollo Crimp Rings, Apollo Pinch Clamps, or Apollo Crimp Sleeves with Apollo PEX Tools. Follow all instructions included with Apollo tools, fittings, and fasteners.


Approvals:

- ASTM F877 and F1807 Conformance - Third Party Certified
- NSF 14 and 61
- IAPMO
- CSA B137.5

Installation:

Squarely cut PEX pipe to desired length and remove burrs. Slide crimp ring, pinch clamp or sleeve over end of pipe. Insert fitting into pipe end until it touches the shoulder of the fitting. Pro crimp rings, pro pinch clamps and stainless steel sleeves will stay on the end of the pipe. Position crimp rings or pinch clamps 1/8"-1/4" from the end of the pipe and over the fitting ribs closes to the end of the fitting. Fasten according to appropriate tool directions. Crimp ring and sleeve connections can be checked with a Go/No-Go Gauge.

Job Name:	
Job Location:	
Engineer:	
Contractor:	
Tag:	
PO Number:	
Representative:	

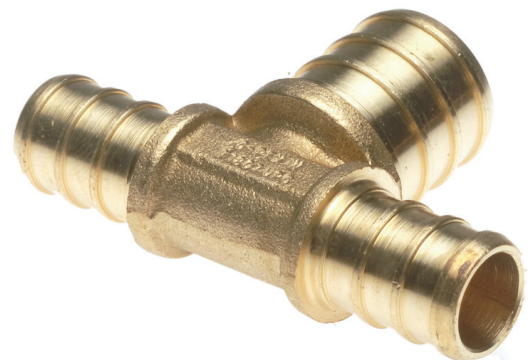



Couplings

Part Number	Description	H	W	D	Wt (lbs)
APXC3838	3/8" x 3/8"	0.500	1.500	0.500	0.230
APXC1238	1/2" x 3/8"	0.625	1.375	0.625	0.280
APXC1212	1/2" x 1/2"	0.625	1.375	0.625	0.330
APXC1234	3/4" x 1/2"	0.875	1.500	0.875	0.102
APXC3434	3/4" x 3/4"	1.000	1.500	1.000	0.102
APXC341	1" x 3/4"	1.250	1.750	1.250	0.134
APXC11	1" x 1"	1.375	1.875	1.375	0.095
APXBC1212	1/2" x 1/2" PB	0.500	1.500	0.500	0.058
APXBC3434	3/4" x 3/4" PB	0.875	1.500	0.875	0.140
APXCPVC12	1/2" x 1/2" CPVC	0.875	2.000	0.875	0.059
APXCPVC34	3/4" x 3/4" CPVC	1.250	2.250	1.250	0.109

90° Elbows

Part Number	Description	H	W	D	Wt (lbs)
APXE12	1/2" x 1/2"	1.250	1.250	0.500	0.046
APXE1234	3/4" x 1/2"	1.500	1.375	0.875	0.109
APXE3434	3/4" x 3/4"	1.500	1.500	0.750	0.134
APXE11	1" x 1"	2.125	2.125	1.00	0.196
APXDEE12	1/2" x 1/2" FPT Drop Ear	1.125	2.500	1.875	0.180
APXDEE3412	3/4" x 1/2" FPT Drop Ear	2.250	2.000	1.375	0.203
APXDEE34	3/4" x 3/4" FPT Drop Ear	2.250	1.875	1.625	0.247
APXFAE1212	1/2" x 1/2" FPT Swivel	1.625	1.750	1.375	0.084
APXFSE12	1/2" x 1/2" FS Elbow	1.125	0.750	1.375	0.063
APXFSE34	3/4" x 3/4" FS Elbow	1.500	1.000	1.750	0.119
APXME12	1/2" x 1/2" MPT	1.125	0.750	1.500	0.056
APXME1234	1/2" x 3/4" MPT	1.250	1.000	1.625	0.088
APXME34	3/4" x 3/4" MPT	1.500	1.000	1.625	0.109

Female Adapters

Part Number	Description	H	W	D	Wt (lbs)
APXFA1212	1/2" x 1/2" FPT	1.000	1.500	1.000	0.090
APXFA1234	1/2" x 3/4" FPT	1.375	1.375	1.375	0.128
APXFA3412	3/4" x 1/2" FPT	1.063	1.063	1.375	0.084
APXFA3434	3/4" x 3/4" FPT	1.375	1.375	1.375	0.140
APXFA34B1F	3/4" x 1" FPT	1.500	1.625	1.500	0.237
APXFA11	1" x 1" FPT	1.750	1.875	1.750	0.334
APXFS1212	1/2" x 1/2" FS	1.500	1.375	1.500	0.046
APXFS3434	3/4" x 3/4" FS	1.000	1.625	1.000	0.134
APXFA11	1" x 1" FS	1.125	1.875	1.125	0.160
APXFB1212S	1/2" x 1/2" FPT Swivel	1.500	1.500	1.500	0.052
APXFF3434S	3/4" x 3/4" FPT Swivel	1.250	1.375	1.250	0.125



Male Adapters

Part Number	Description	H	W	D	Wt (lbs)
APXMA3812	3/8" x 1/2" MPT	1.000	1.438	1.000	0.072
APXMA1212	1/2" x 1/2" MPT	1.120	1.500	1.120	0.081
APXMA1234	3/4" x 1/2" MPT	1.125	1.500	0.875	0.121
APXMA3412	1/2" x 3/4" MPT	1.500	1.625	1.250	0.152
APXMA3434	3/4" x 3/4" MPT	1.375	1.750	1.375	0.171
APXMA341	3/4" x 1" MPT	1.500	1.750	1.50	0.208
APXMA134	1" x 3/4" MPT	1.625	1.250	1.625	0.116
APXMA11	1" x 1" MPT	1.625	1.875	1.625	0.223
APXMS1212	1/2" x 1/2" MS	0.625	1.375	0.625	0.090
APXMS3434	3/4" x 3/4" MS	1.000	1.500	1.000	0.079
APXMSA11	1" x 1" MS	1.125	1.875	1.125	0.130

Tees

Part Number	Description	H	W	D	Wt (lbs)
APXT38	3/8" x 3/8" x 3/8"	1.125	1.875	0.375	0.096
APXT12	1/2" x 1/2" x 1/2"	1.250	2.000	0.500	0.060
APXT121234	1/2" x 1/2" x 3/4"	1.375	2.125	0.750	0.078
APXT341212	3/4" x 1/2" x 1/2"	1.510	2.125	0.750	0.084
APXT341234	3/4" x 1/2" x 3/4"	1.500	2.125	0.750	0.870
APXT343412	3/4" x 3/4" x 1/2"	1.500	2.000	0.750	0.089
APXT34	3/4" x 3/4" x 3/4"	1.500	2.250	0.750	0.104
APXT1112	1" x 1" x 1/2"	1.750	2.625	0.875	0.156
APXT1134	1" x 1" x 3/4"	1.750	2.625	0.875	0.156
APXT11	1" x 1" x 1"	1.875	2.875	0.875	0.194

Press Adapters

Part Number	Description	H	W	D	Wt (lbs)
APXPR1212	1/2" x 1/2" Press	1.875	1.875	1.625	0.063
APXPR3434	3/4" x 3/4" Press	1.250	1.250	1.625	0.106
APXPR11	1" x 1" Press	1.500	1.500	2.125	0.150

Test Plugs

Part Number	Description	H	W	D	Wt (lbs)
APXP12	1/2"	0.625	0.875	0.625	0.045
APXP34	3/4"	0.875	1.000	0.875	0.077

Copper Stub-Out 90° Elbow With Flange

Part Number	Description	H	W	D	Wt (lbs)
APXSTUB8WE	8" Length x 1/2" PEX Barb	4.750	2.125	8.250	0.281



Drop Ear Tees

Part Number	Description	H	W	D	Wt (lbs)
APXDET12	1/2" x 1/2" x 1/2" FPT	1.125	2.125	2.375	0.175
APXDET34	3/4" x 3/4" x 3/4" FPT	1.375	2.125	2.625	0.238



90° Elbows

Part Number	Description	H	W	D	Wt (lbs)
APXMT12	1/2" x 1/2" x 1/2" MPT	1.250	0.750	2.000	0.081
APXMT34	3/4" x 3/4" x 3/4" MPT	1.500	1.000	2.375	0.138